


3-WAY STAINLESS STEEL BALL VALVE #3L66F-150DM & #3T66F-150DM

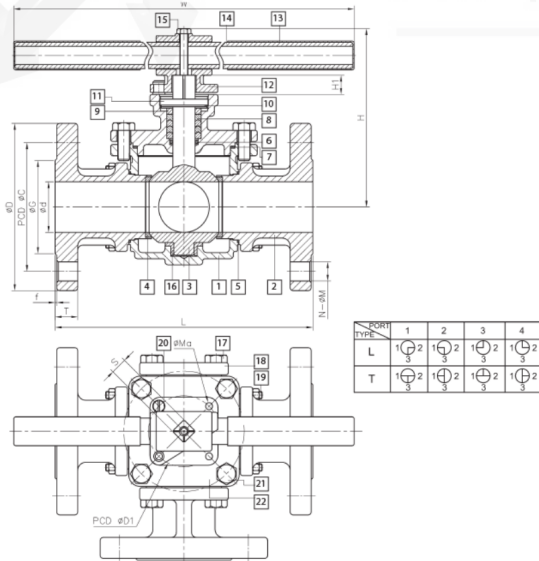

COLE
INDUSTRIAL
PVF | SANITARY | STRUCTURAL

NO.	DESCRIPTION	MATERIAL
1	BODY	ASTM A351-CF8M
2	CAP	ASTM A351-CF8M
3	BALL & STEM	ASTM A351-CF8M
4	SEAT	RTFE
5	GASKET	RTFE
6	O-RING	VITON
7	GASKET	RTFE
8	PACKING	RTFE
9	GLAND RING	SUS 304
10	SPRING WASHER	SUS 301
11	CAP-C	ASTM A351-CF8M
12	HANDLE HEAD	ASTM A351-CF8
13	HANDLE SLEEVE	PLASTIC
14	HANDLE POLE	GALVANIZED PIPE
15	HANDLE BOLT	SUS 304
16	SLEEVE	RTFE
17	CAP-B BOLT	SUS 304
18	CAP-B	ASTM A351-CF8M
19	BOLT	SUS 304
20	STOP PIN	SUS 304
21	CAP-A BOLT	SUS 304
22	CAP-A	ASTM A351-CF8M

NPS	d	G	C	D	L	H	H1	W	T	f	S	D1	N	M	Ma	ISO 5211	L-port Wt	T-port Wt	Torque(in-lb)
1-1/2"	1.57	2.87	3.88	5	8.7	6.73	0.75	15.87	0.56	0.06	0.67	2.76	4	0.63	0.39	7	27.8	27.8	632.8
2"	1.97	3.62	4.74	5.98	10	6.93	0.75	15.87	0.63	0.06	0.67	2.76	4	0.75	0.39	7	35.9	35.6	920.5
2-1/2"	2.56	4.13	5.49	7.01	11.81	8.19	0.94	19.84	0.69	0.06	0.87	4.02	4	0.75	0.47	10	60.8	58.4	1380.7
3"	2.99	5	6	7.48	12.01	8.5	0.94	19.84	0.75	0.06	0.87	4.02	4	0.75	0.47	10	75	74.7	2071.1
4"	3.78	6.18	7.5	9.02	14.53	9.29	0.94	19.84	0.94	0.06	0.87	4.02	8	0.75	0.47	10	139.8	136.5	2531.3

*Actual torque values may vary. Please consult the factory.

**All torque values are in in-lb. Weight values are in lb.

