




ANSI B16.5 CLASS 600 FORGED FLANGES

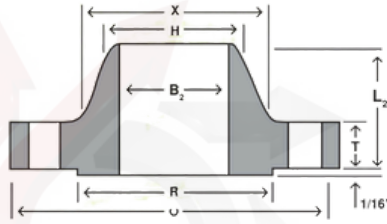


WELD NECK

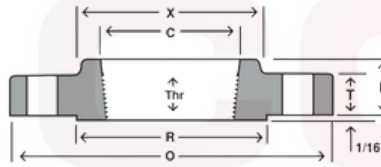


THREADED

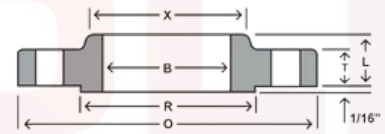

SLIP-ON



LAP JOINT

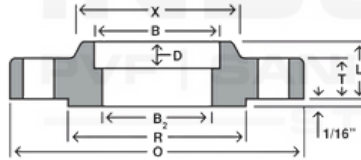

SOCKET WELD



BLIND

Nom. Pipe Size	O	T	R	X	#/Dia of Holes	Bolt Circle Dia	B	B2b*	B3	H	L	L2	L3c	r	C	D	Thr
1/2	3.75	0.56	1.38	1.5	4-0.63	2.62	0.88		0.9	0.84	0.88	2.06	0.88	0.12	0.93	0.38	0.62
3/4	4.62	0.62	1.69	1.88	4-0.75	3.25	1.09		1.11	1.05	1	2.25	1	0.12	1.14	0.44	0.62
1	4.88	0.69	2	2.12	4-0.75	3.5	1.36		1.38	1.32	1.06	2.44	1.06	0.12	1.41	0.5	0.69
1 1/4	5.25	0.81	2.5	2.5	4-0.75	3.88	1.7		1.72	1.66	1.12	2.62	1.12	0.19	1.75	0.56	0.81
1 1/2	6.12	0.88	2.88	2.75	4-0.88	4.5	1.95		1.97	1.9	1.25	2.75	1.25	0.25	1.99	0.62	0.88
2	6.5	1	3.62	3.31	8-0.75	5	2.44		2.46	2.38	1.44	2.88	1.44	0.31	2.5	0.69	1.12
2 1/2	7.5	1.12	4.12	3.94	8-0.88	5.88	2.94		2.97	2.88	1.62	3.12	1.62	0.31	3	0.75	1.25
3	8.25	1.25	5	4.62	8-0.88	6.62	3.57		3.6	3.5	1.81	3.25	1.81	0.38	3.63	0.81	1.38
3 1/2	9	1.38	5.5	5.25	8-1.00	7.25	4.07		4.1	4	1.94	3.38	1.94	0.38	4.13		1.56
4	10.75	1.5	6.19	6	8-1.00	8.5	4.57		4.6	4.5	2.12	4	2.12	0.44	4.63		1.62
5	13	1.75	7.31	7.44	8-1.12	10.5	5.66		5.69	5.56	2.38	4.5	2.38	0.44	5.69		1.88
6	14	1.88	8.5	8.75	12-1.12	11.5	6.72		6.75	6.63	2.62	4.62	2.62	0.5	6.75		2
8	16.5	2.19	10.62	10.75	12-1.25	13.75	8.72		8.75	8.63	3	5.25	3	0.5	8.75		2.25
10	20	2.5	12.75	13.5	16-1.38	17	10.88		10.92	10.75	3.38	6	4.38	0.5	10.88		2.56
12	22	2.62	15	15.75	20-1.38	19.25	12.88		12.92	12.75	3.62	6.12	4.62	0.5	12.94		2.75
14	23.75	2.75	16.25	17	20-1.50	20.75	14.14		14.18	14	3.69	6.5	5	0.5	14.19		2.88
16	27	3	18.5	19.5	20-1.63	23.75	16.16		16.19	16	4.19	7	5.5	0.5	16.19		3.06
18	29.25	3.25	21	21.5	20-1.75	25.75	18.18		18.2	18	4.62	7.25	6	0.5	18.19		3.12
20	32	3.5	23	24	24-1.75	28.5	20.2		20.25	20	5	7.5	6.5	0.5	20.19		3.25
22	34.25	3.75	25.25	26.25	24-1.75	30.63	22.22		22.25	22	5.25	7.75	6.88	0.5			--
24	37	4	27.25	28.25	24-2.00	33	24.25		24.25	24	5.5	8	7.25	0.5	24.19		3.62

DIMENSIONS ARE IN INCHES

(A) Bolt hole diameter 1/8" larger than bolt diameter

(B) Standard bore dimensions provided. See bore chart for other wall thicknesses

(C) This dimension is commonly associated with "true" lap joints. Industry standard is to make to the slip on length through the hub

*To be specified by purchaser

